

AUTOMATED
CABLE SOLUTIONS LTD

UK DISTRIBUTORS FOR
CARPENTER USA

Automated Cable Solutions Ltd

Unit 5 Home Farm Business Centre
Riverside, Eynsford.

Kent

DA4 0AE

United Kingdom

Tel: 01322 866891

Mob: 07796548263

Email: sales@automatedcablesolutions.co.uk

Web: www.automatedcablesolutions.co.uk




MODEL 360 Compu-Cut®

Automatic Material Cutter

The Model 360 Compu-Cut® is specifically designed to provide clean, square, and accurate cuts on a broad range of wire, cable, tubing and sleeving. The machine utilizes a powerful feed belt material transport that won't damage or crush the material being processed. This works in conjunction with a powerful pneumatic blade mechanism which incorporates an interchangeable modular cutting head. The optional modular cutting head design enables the use of two different configurations.

The utility blade cutter assembly is used for cutting wire, cable and tubing. For round material and tubing applications the utility blade cutter assembly offers great affordability and provides clean, square cuts. The optional sleeving cutter head assembly is used to cut sleeving and flat material. When processing heat shrink tubing or flat materials, the sleeving cutter head assembly ensures fast, accurate pieces. Changeover is remarkably easy, taking less than 3 minutes to switch between both assemblies.

Ease of operation is further enhanced with Carpenter's user-friendly, menu-driven software. Our exclusive Compu-Cut® software is simple to program and offers a host of flexible processing features. The Model 360 is built to increase speed, accuracy, and efficiency. Every Model 360 comes standard with a durable powder coat finish and a 1-year limited factory warranty.

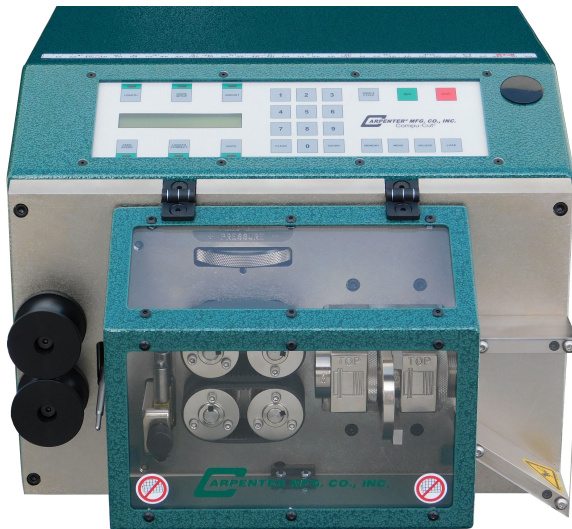

FEATURES:

- Powerful Feed Belt Material Transport
- Pneumatic Blade Mechanism
- Automatic Material Loading and Unloading
- Modular Designed Cutter Heads
- 999 Single Program Memory Storage
- 500 Kit Program Memory Storage
- Safety Guard with Interlock Switch
- Programmable Password
- 5 Programmable Feed Speeds
- Inches or Millimeters, User-selectable
- "Material Cut" Sensor
- "Out of Material" Sensor
- Auto-switching Power Supply
- User-friendly, Menu-driven Software
- 1 Input & 1 Output Guide
- 1-year Limited Warranty

SPECIFICATIONS:

Cut Length	0.05" to 9,999.99" (1.2mm to 99,999.9mm)
Length Increments	0.01"
Amount	1 to 999,999
Round Material	1.0" (25.4mm) Maximum, Material Dependent
Flat Material	1.0" (25.4mm) Maximum Width, .312" Maximum Thickness
Voltage	88 to 264 VAC, 47 to 63Hz, 4 Amp (Auto Switching)
Air Supply	80 to 100 PSI (5.5 to 6.9 BAR), *Clean, Lubricated, Filtered Air Only*
Warranty	1-year Limited Warranty
Dimensions	13.7" W x 11.0" H x 17.0" D (Including Safety Guard)
Weight	52 lbs (24 kg)

All features subject to change without notice

Carpenter Mfg. Co., Inc. always suggests that you send your material samples to us for a free material evaluation. This will ensure that the equipment we quote is correct for your application. To learn more visit our website at: www.carpentermfg.com